

ROLCO SHUTTERS *Comfort & Security*



ROLLING STEEL COUNTER FIRE DOOR

Manufactured in Canada

Long-lasting fire shutter system featuring a 2" 2F flat slat curtain in 22 gauge steel

Approved for all wall types (concrete, masonry, structural steel, rated gypsum board / Steel Stud and rated gypsum board / wood)

Provides years of trouble free operation

Available in push up, or crank operation

ROLCO SHUTTERS

Comfort & Security

COUNTER FIRE DOOR




FEATURES

- Rugged 2" flat slats in 22 ga. steel
- Compact mechanical governor controls automatic closing speed of 6" to 2' per second
- Resetting is simple and can be performed by a single technician. Resets from one side of opening, reducing testing costs.
- Oil tempered springs for higher cycle life
- Fuse link release device
- Finish:** Rugged 2" flat slats in corrosion resistant grey prime finish
- Headroom Required:** 12"

Materials and Construction

Slats	2" flat slats , 22 ga. steel
Fire label	1 1/2, 3 hour (4 hour available for masonry applications)
Maximum Opening Width	13'
Maximum opening Height	9'
Maximum sq footage of curtain	96' ft2
Maximum size for drywall with wood jambs	8'-0" x 9' 0"
Warranty	2 years on materials and workmanship

Slats

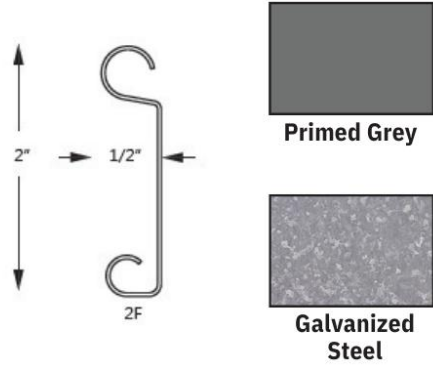

Operation-Models

- BPCF:** Push up, between jamb
- BKCF:** Crank, between jamb
- FKCF:** Crank, face of wall
- FPCF:** Push up, face of wall

Options



Fire Link release device



Bottom Steel Sill Angle

Hardware

Refer to hardware specification sheet for full information and options



137 Fisher Street, PO Box 381, Okotoks, Alberta
T : 403-279-7725 www.rolco.com



ROLCO **SHUTTERS** *Comfort & Security*



ROLLING STEEL SERVICE FIRE DOOR

Manufactured in Canada

2" flat slat or curved slat curtain in 22ga. steel

Provides years of trouble free operation

Available in push up, chain hoist, stay open and motor operation

Fluid governor release mechanism for smooth and quiet operation


ROLCO SHUTTERS

Comfort & Security

Rolling Steel Fire Door



Slats

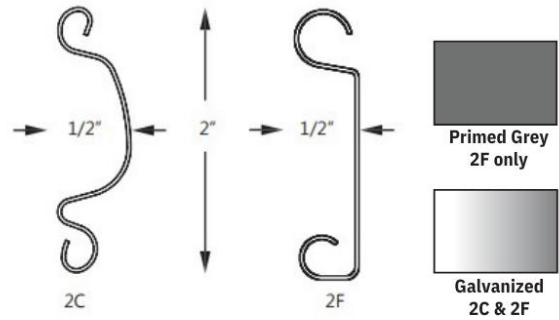

Operation-Models

- FPF:** Push up, face of wall
- FCF:** Chain Hoist, face of wall
- FMF:** Motor, face of wall
- FSF:** Stay Open, face of wall

Options



Slide Bolt Lock



UL Brush Weather-seal



Nema 7/9
Explosion proof motor



Nema 4 Water proof motor
Nema 4X Corrosion proof motor



Fire Link
release device



Bottom
Sensing Edge

Hardware

Refer to hardware specification sheet for full information and options



FEATURES

- Rugged 2" flat slats or curved slats in 22 ga. steel
- G90 galvanized curtain and hood does not require further painting
- Drop test is simple and can be performed by a single technician. Resets from one side of opening, reducing testing costs
- Steel plate brackets are more durable than stamped steel bracket plates
- Between jamb mount also available

Materials and Construction

Slats	2" flat or curved slats , 22 ga. steel
Fire label	3/4, 1 1/2, 3 hour (4 hour available for masonry applications) Oversize label available for larger openings
Bottom Bar	Steel double angle
Guides	3 structural steel angle
Hood	24g steel
Headplate	1/4" thick
Maximum Size of Openings Tested	13'6" x 12'0" high
Warranty	2 years on materials and workmanship



137 Fisher Street, PO Box 381, Okotoks, Alberta
T : 403-279-7725 www.rolco.com

